


---

# LAYING OF POLISHED WALL CAPS

---

## LAYING OF WALL CAPS 1/4 GLUE

Dispose the glue on the wall or on the modules for coupling with wall caps. Follow the instructions for use and the safety data sheet indicated by the producer.

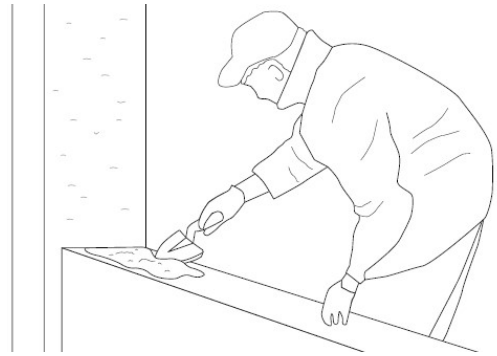

## LAYING OF WALL CAPS 2/4 GROUT JOINTS


Lay the wall caps. Grout the joints when laying is finished.

Depending on the length of the fence and the temperature range, prepare suitable expansion joints.




## LAYING OF WALL CAPS 3/4 LED

For the wall coverings Led: lay by leaving 1 or 2 cm space from the wall cap to the wall at the led side, in order to increase the effect of dripstone for a complete protection of the wall.

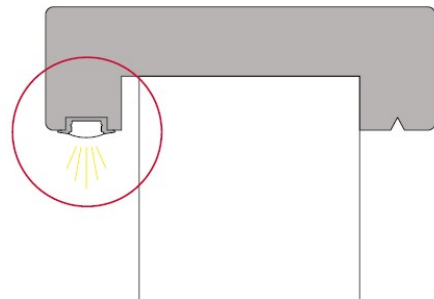

## LAYING OF WALL CAPS 4/4 CURVES AND ANGLES

Shape the wall caps with an angle grinder for following the curves or the angles.

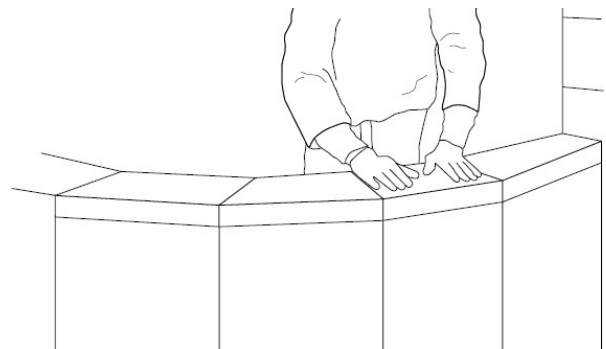

## LAYING INDICATIONS WALL CAPS

Polished wall cap is produced with concrete composed of natural inerts and binders. The presence of little holes of less than 10 mm diameter must not be considered a defect, but they must be grouted during installation together with joint sealing. The product is waterproof for limiting water absorption, but we recommend always to make another surface treatment after installation with a water-repellent with natural effect and protective.